


A2F Non armoured cable gland

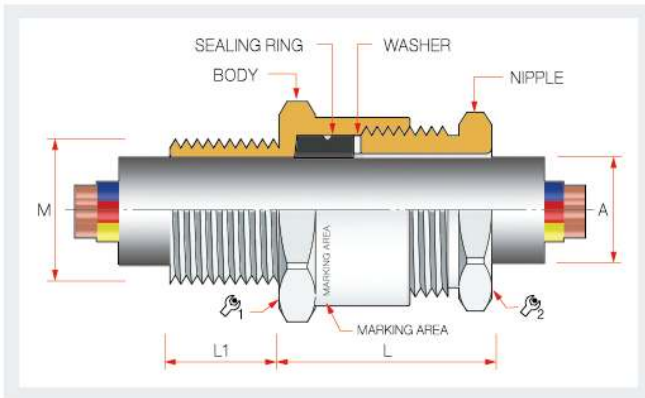

Application

For use with all types of unarmoured and braided cable for Zone1 & Zone2 in hazardous area.
Single compression for jacket of cable.

Certificate

IECEX KGS (IECEX KGS 16.0004X)
ATEX DEKRA (17ATEX0093X)

Type Protection

Ex d IIC Gb / Ex e IIC Gb / Ex tb IIC Db / IP66/67
The service temperature range is -60°C ~ +120°C

Material

Brass, Brass with Nickel Plated(Standard), Stainless Steel


Accessories

Lock Nut, Gasket, Earth Tag, Shroud, Serrated Washer

How to order

CN-A2F 20b / NPT1/2"

→ Entry thread size
→ Gland type / Size

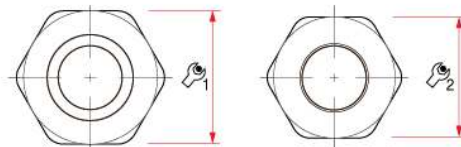

CN-A2F Type / Size	Entry thread size (M)		Cable Range(A)	Thread length (L1)			1	2	L
	Metric	PF, NPT		Metric	PF	NPT			
CNA2F-16a	M16 / M20	3/8" / 1/2"	4 ~ 8	15	13 / 17	13 / 15	22	19	20
CNA2F-16b	M16 / M20	3/8" / 1/2"	7 ~ 10	15	13 / 17	13 / 15	22	19	20
CNA2F-20a	M20 / M25	1/2" / 3/4"	9 ~ 13	15	17 / 17	15 / 16	27	24	21
CNA2F-20b	M20 / M25	1/2" / 3/4"	12 ~ 15	15	17 / 17	15 / 16	27	24	21
CNA2F-25a	M25 / M32	3/4" / 1"	14 ~ 18	15	17 / 22	16 / 18	32	28	25
CNA2F-25b	M25 / M32	3/4" / 1"	17 ~ 20	15	17 / 22	16 / 18	32	28	25
CNA2F-32a	M32 / M40	1" / 1-1/4"	18 ~ 23	15	22 / 22	18 / 19	39	34	26
CNA2F-32b	M32 / M40	1" / 1-1/4"	22 ~ 26	15	22 / 22	18 / 19	39	34	26
CNA2F-40a	M40 / M50	1-1/4" / 1-1/2"	24 ~ 29	15	22 / 22	19 / 19	48	42	28
CNA2F-40b	M40 / M50	1-1/4" / 1-1/2"	28 ~ 32.5	15	22 / 22	19 / 19	48	42	28
CNA2F-50a	M50 / M63	1-1/2" / 2"	31 ~ 37	15	22 / 23	19 / 20	58	53	30
CNA2F-50b	M50 / M63	1-1/2" / 2"	36 ~ 41	15	22 / 23	19 / 20	58	53	30
CNA2F-63a	M63 / M75	2" / 2-1/2"	41 ~ 46	15	23 / 23	20 / 27	73	65	31
CNA2F-63b	M63 / M75	2" / 2-1/2"	45 ~ 50	15	23 / 23	20 / 27	73	65	31
CNA2F-63c	M63 / M75	2-1/2"	49 ~ 54.5	15	23	27	73	65	31
CNA2F-75a	M75 / M90	2-1/2" / 3"	53 ~ 59	15	23 / 27	27 / 28	85	78	36
CNA2F-75b	M75 / M90	2-1/2" / 3"	58 ~ 63	15	23 / 27	27 / 28	85	78	36
CNA2F-75c	M75 / M90	2-1/2" / 3"	62 ~ 66.5	15	23 / 27	27 / 28	85	78	36
CNA2F-90a	M90 / M100	3" / 3-1/2"	64 ~ 69	20	27 / 28	28 / 30	100	92	38
CNA2F-90b	M90 / M100	3" / 3-1/2"	68 ~ 73	20	27 / 28	28 / 30	100	92	38
CNA2F-90c	M90 / M100	3" / 3-1/2"	72 ~ 77	20	27 / 28	28 / 30	100	92	38
CNA2F-100a	M100	3-1/2" / 4"	76 ~ 81	20	28 / 28	30 / 31	112	104	40
CNA2F-100b	M100	3-1/2" / 4"	80 ~ 85	20	28 / 28	30 / 31	112	104	40
CNA2F-100c	M100	3-1/2" / 4"	84 ~ 89	20	28 / 28	30 / 31	112	104	40
CNA2F-110a	M115	4"	87 ~ 94	20	28	31	125	112	45
CNA2F-110b	M115	4"	92 ~ 98	20	28	31	125	112	45